




Sunlight **OPzV** Key Advantages

**Unstable
power network
or sensitive
environment?**

OPzV batteries provide a premium,
efficient and maintenance-free
energy solution for **critical
stand-by applications.**

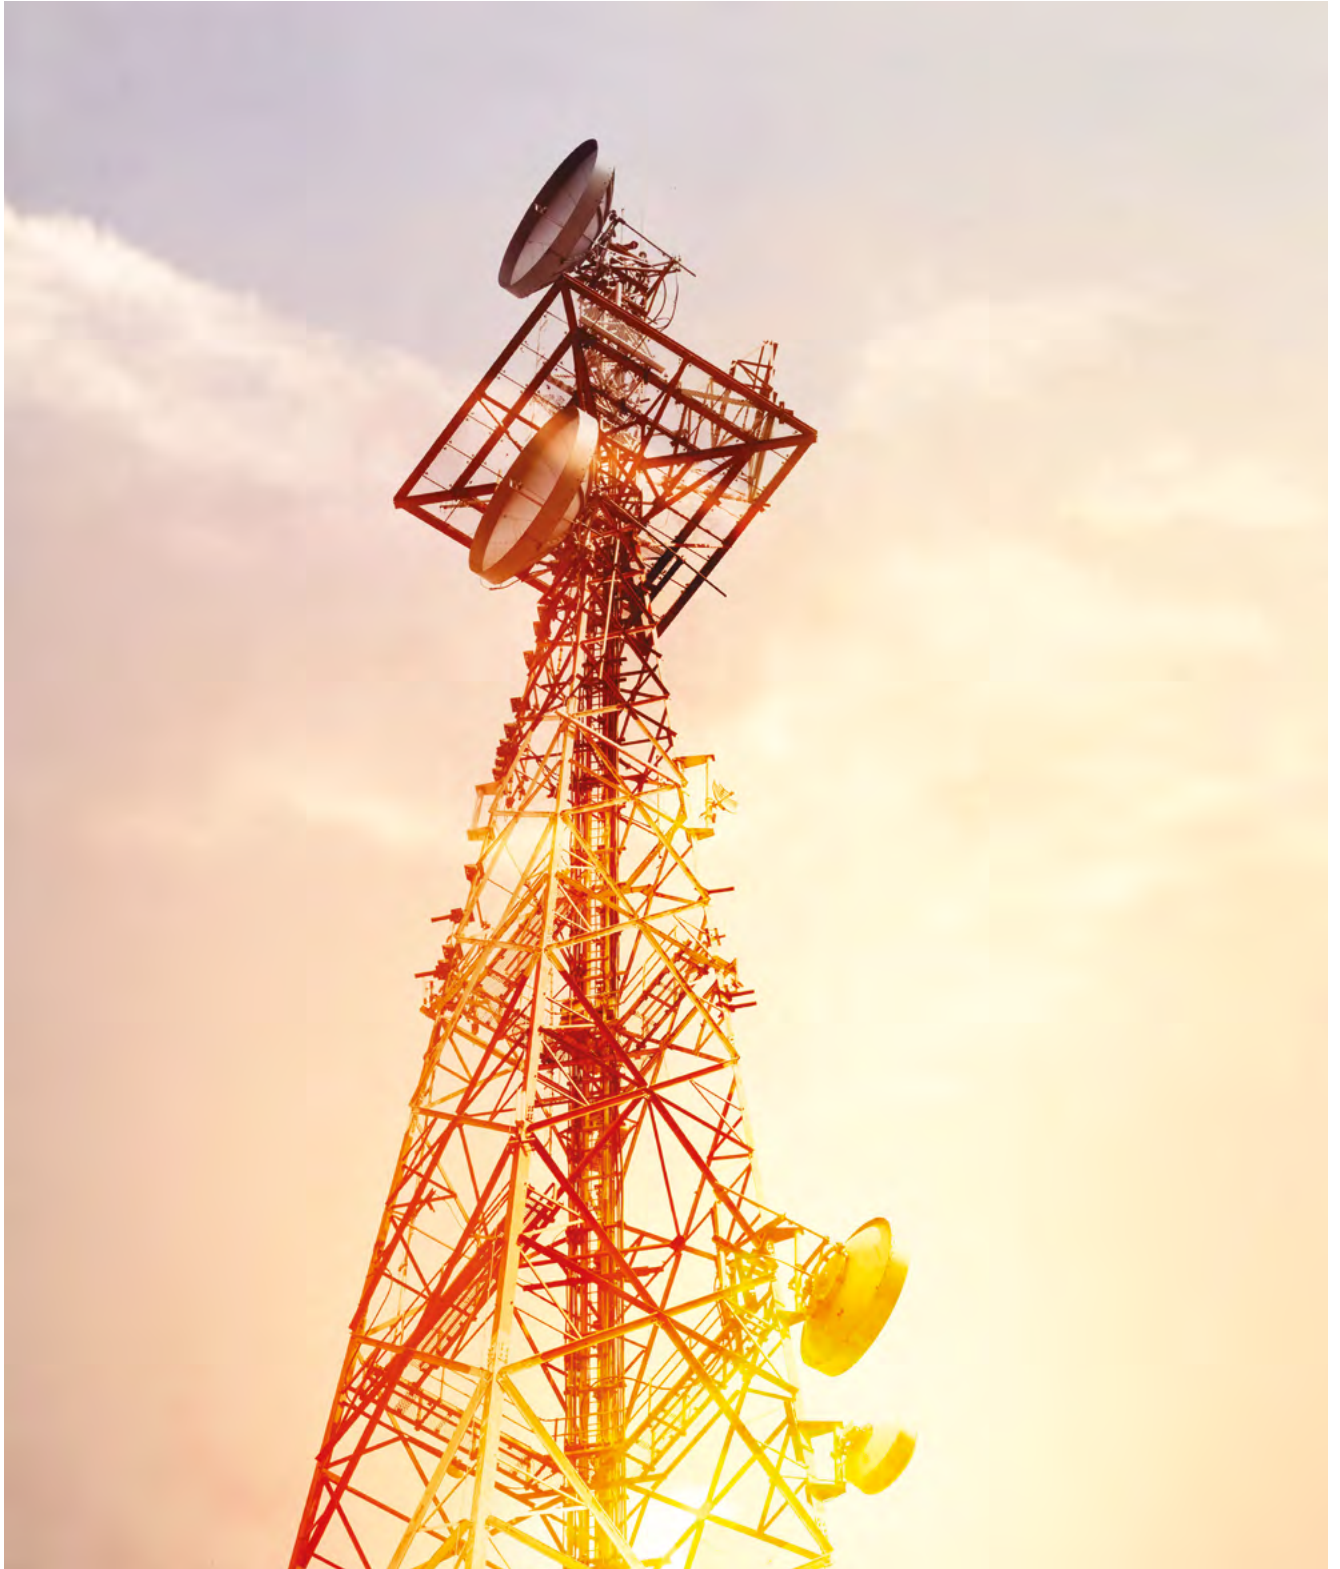

**Maintenance-Free
Operation**



**Long Design Life
up to 20 Years**



**Operational
Safety**



**Flexible installation
Variants available for Vertical
or Horizontal Installation**




**Excellent Capacity
Performance**



**Fully Recyclable Product
Circular Economy Enabler**

The Sunlight **Red Lead Advantage**

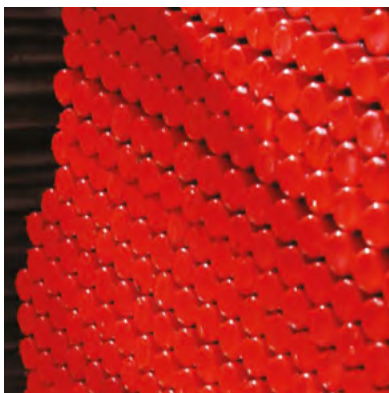

Features

99.99%
pure lead
for Red Lead
production

100%
Red Lead in our
positive plates
through dry filling
process

100%
plates weight
control and
data statistical
evaluation

Benefits

Longer life
span of batteries

Full Capacity
within the first
3-5 cycles

Minimized
self-discharge

Sustained
performance
throughout
battery lifetime

Sunlight **OPzV** Cells and Blocks

Batteries with GEL Electrolyte Main Characteristics

Valve Regulated lead-acid batteries with tubular plates and GEL electrolyte for stand-by applications



Product Range

	Model	Voltage [V]	Rated Capacity at 20°C (68°F)			Dimensions				Weight	Terminal Details	
			C ₁₀ / 1,80 V [Ah]	C ₈ / 1,75 V [Ah]	C ₅ / 1,75 V [Ah]	Length - L [mm (in)]	Width - W [mm (in)]	Height - h1 [mm (in)]	Height - h2 [mm (in)]	Wet [kg (lb)]	Number of Poles	Layout
Cells	2V 2 OPzV 100	2	122	119	108	103 (4.06)	206 (8.11)	354 (13.94)	382 (15.04)	13.6 (30.0)	2	Fig 1
	2V 3 OPzV 150	2	183	179	162	103 (4.06)	206 (8.11)	354 (13.94)	382 (15.04)	15.8 (34.8)	2	Fig 1
	2V 4 OPzV 200	2	244	239	216	103 (4.06)	206 (8.11)	354 (13.94)	382 (15.04)	18.2 (40.1)	2	Fig 1
	2V 5 OPzV 250	2	305	298	270	124 (4.88)	206 (8.11)	354 (13.94)	382 (15.04)	21.9 (48.3)	2	Fig 1
	2V 6 OPzV 300	2	366	358	324	145 (5.71)	206 (8.11)	354 (13.94)	382 (15.04)	25.9 (57.1)	2	Fig 1
	2V 5 OPzV 350	2	435	426	385	124 (4.88)	206 (8.11)	471 (18.54)	499 (19.65)	30.1 (66.4)	2	Fig 1
	2V 6 OPzV 420	2	522	512	463	145 (5.71)	206 (8.11)	471 (18.54)	499 (19.65)	35.6 (78.5)	2	Fig 1
	2V 7 OPzV 490	2	609	597	540	166 (6.54)	206 (8.11)	471 (18.54)	499 (19.65)	41.0 (90.4)	2	Fig 1
	2V 5 OPzV 500	2	625	615	552	145 (5.71)	206 (8.11)	643 (25.31)	671 (26.42)	43.9 (96.8)	2	Fig 1
	2V 6 OPzV 600	2	750	738	663	145 (5.71)	206 (8.11)	643 (25.31)	671 (26.42)	48.3 (106.5)	2	Fig 1
	2V 7 OPzV 700	2	875	859	773	191 (7.52)	210 (8.27)	644 (25.35)	672 (26.46)	61.1 (134.7)	4	Fig 2
	2V 8 OPzV 800	2	1000	982	884	191 (7.52)	210 (8.27)	644 (25.35)	672 (26.46)	65.5 (144.4)	4	Fig 2
	2V 9 OPzV 900	2	1125	1106	994	233 (9.17)	210 (8.27)	646 (25.43)	674 (26.54)	76.0 (167.6)	4	Fig 2
	2V 10 OPzV 1000	2	1250	1228	1105	233 (9.17)	210 (8.27)	646 (25.43)	674 (26.54)	80.4 (177.3)	4	Fig 2
	2V 11 OPzV 1100	2	1375	1353	1215	275 (10.83)	210 (8.27)	645 (25.39)	673 (26.50)	90.8 (200.2)	4	Fig 2
	2V 12 OPzV 1200	2	1500	1476	1326	275 (10.83)	210 (8.27)	645 (25.39)	673 (26.50)	95.3 (210.1)	4	Fig 2
	2V 11 OPzV 1375	2	1573	1550	1386	275 (10.83)	210 (8.27)	796 (31.34)	824 (32.44)	105.1 (231.7)	4	Fig 2
	2V 12 OPzV 1500	2	1716	1691	1512	275 (10.83)	210 (8.27)	796 (31.34)	824 (32.44)	110.2 (242.9)	4	Fig 2
	2V 14 OPzV 1750	2	2002	1972	1764	399 (15.71)	214 (8.43)	771 (30.35)	799 (31.46)	146.0 (321.9)	6	Fig 3
	2V 15 OPzV 1875	2	2145	2113	1890	399 (15.71)	214 (8.43)	771 (30.35)	799 (31.46)	151.1 (333.1)	6	Fig 3
2V 16 OPzV 2000	2	2288	2254	2016	399 (15.71)	214 (8.43)	771 (30.35)	799 (31.46)	156.2 (344.4)	6	Fig 3	
2V 18 OPzV 2250	2	2574	2531	2269	487 (19.17)	212 (8.35)	769 (30.28)	797 (31.38)	185.2 (408.3)	8	Fig 4	
2V 20 OPzV 2500	2	2860	2813	2521	487 (19.17)	212 (8.35)	769 (30.28)	797 (31.38)	195.3 (430.6)	8	Fig 4	
2V 22 OPzV 2750	2	3146	3101	2772	576 (22.68)	212 (8.35)	771 (30.35)	799 (31.46)	221.5 (488.3)	8	Fig 4	
2V 24 OPzV 3000	2	3432	3385	3023	576 (22.68)	212 (8.35)	771 (30.35)	799 (31.46)	231.6 (510.6)	8	Fig 4	
2V 26 OPzV 3250	2	3718	3672	3273	576 (22.68)	212 (8.35)	771 (30.35)	799 (31.46)	241.8 (533.1)	8	Fig 4	
Blocks	6V 4 OPzV 200	6	220	216	198	272 (10.71)	205 (8.07)	332 (13.07)	372 (14.65)	48.5 (106.9)	2	Fig 5
	6V 5 OPzV 250	6	275	271	248	380 (14.96)	205 (8.07)	332 (13.07)	372 (14.65)	62.9 (138.7)	2	Fig 5
	6V 6 OPzV 300	6	330	325	297	380 (14.96)	205 (8.07)	332 (13.07)	372 (14.65)	69.8 (153.9)	2	Fig 5
	12V 1 OPzV 50	12	54	53	49	272 (10.71)	205 (8.07)	332 (13.07)	372 (14.65)	42.2 (93.0)	2	Fig 6
	12V 2 OPzV 100	12	108	106	98	272 (10.71)	205 (8.07)	332 (13.07)	372 (14.65)	50.6 (111.6)	2	Fig 6
	12V 3 OPzV 150	12	162	159	146	380 (14.96)	205 (8.07)	332 (13.07)	372 (14.65)	71.8 (158.3)	2	Fig 6

Designed according to DIN 40742, 40744


All dimensions and weights shown are subject to manufacturing tolerances.

Vertical installation is the default installation for OPzV cells. For horizontal installation special 'OPzV HP' cells are also available upon customer request.

Height 2 (h2) includes installed connectors and bolts.

M10 Terminal type (applicable to all models).

Terminal Layout

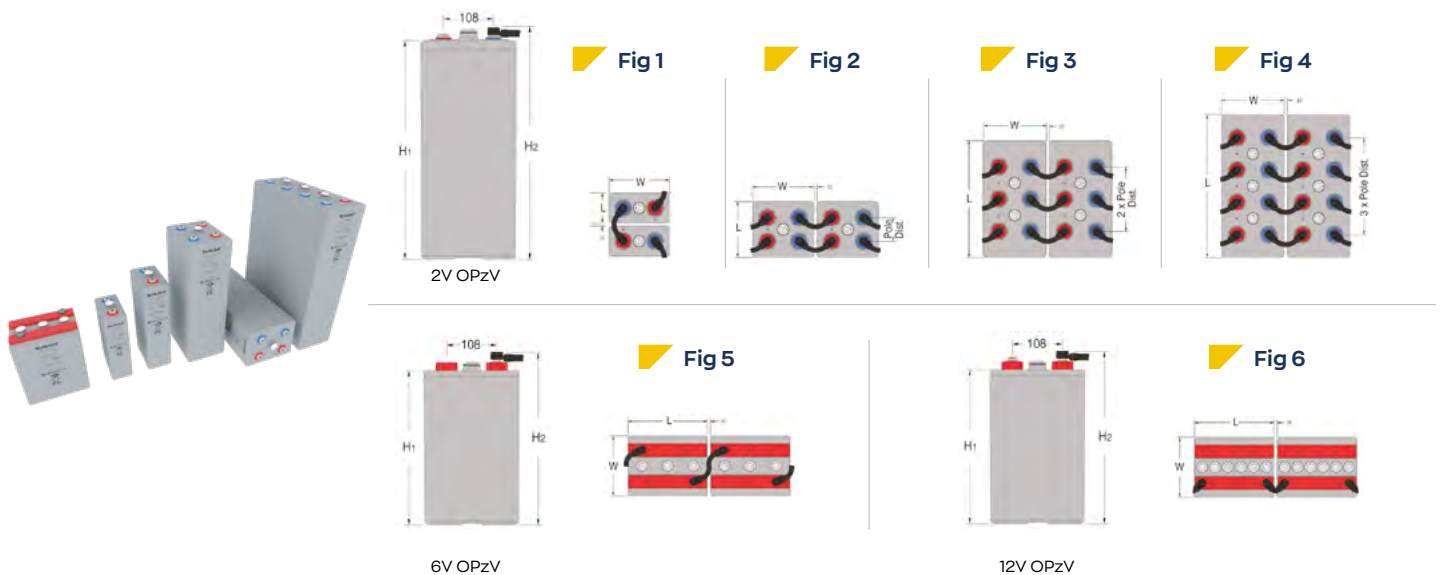

Applications

Developed For Stand-By Applications Requiring High Level Of Safety And Reliability



UPS Systems

Grid - Ancillary Services

Power Generation & Utilities



Telecom Networks

Emergency Lighting

Traffic Signal Systems



IEC 60896-21/ IEC 60896-22/ IEC 62485-2
DIN 40742/ DIN 40744/ DIN 43539 Part 5
ISO 9001/ ISO 14001/ ISO 45001



Sunlight Group Energy Storage Systems
Headquarters Greece T: +30 210 624 5400

info@sunlight.gr
the-sunlight-group.com

